



Dajulong No.7
复合商用卷材地板

DajuLong[®]
大巨龙弹性地板



会讲故事的地板

Story Teller

As Time Goes By
岁月自成芳华

Flooring / 地板: Dajulong Iron-chair / 铁椅: Deyuan
Cement-ornament / 水泥摆件: Veltilate

时间缓慢地流过，刻画出有层次的美
它的美不断地吸引着我们，这就是Dajulong No.7的魅力

The layers of beauty that come with the passage of time
A meditation on the endlessly alluring Dajulong No.7

Dajulong No.7

Dimension: 2.0mm × 2.0m × 20m



JL07-01



JL07-05




JL07-06



JL07-02



JL07-04

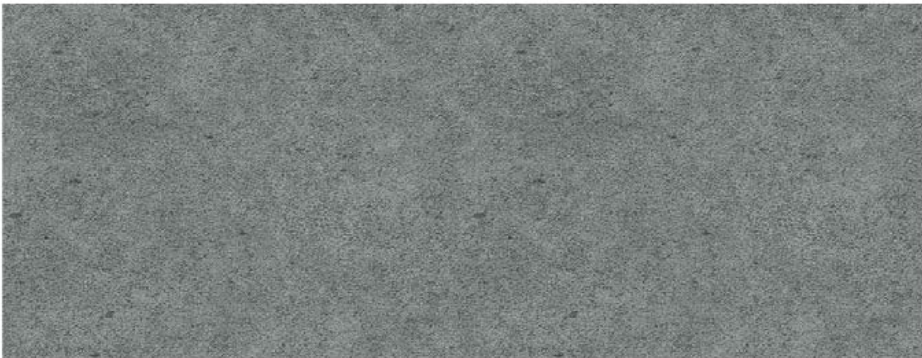

JL07-03

Dajulong No.7


规格: 2.0m × 2.0m × 20m



JL07-16



JL07-11

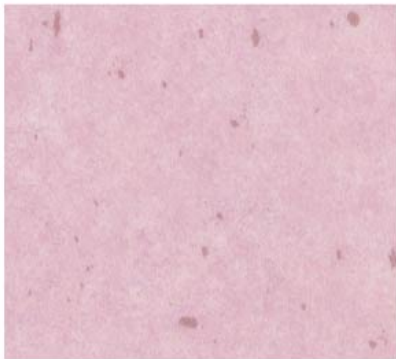

JL07-13



JL07-14



JL07-12

Dajulong No.7


Dimension: 2.0mm × 2.0m × 20m



JL07-33



JL07-21

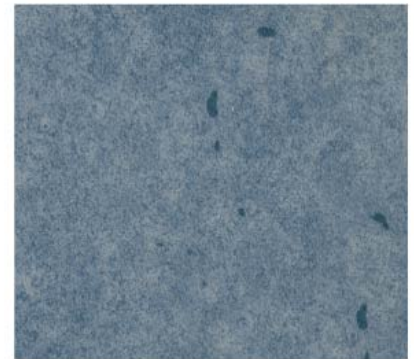

JL07-22



JL07-31



JL07-32



JL07-23

Dajulong No.7

复合商用卷材地板



Description 规格	Standard 标准	Result 结果
Total thickness 总厚度	EN 428	2.0 mm
Wear layer thickness 耐磨层	EN 429	0.35 mm
Width 宽度	EN 426	2 m
Length of sheet 卷长	EN 426	20 m

Classification 类别

Fire rating 防火等级	GB 8624-2012	B1
Toxic testing 有害物质检测	GB 18586-2001	Good 合格
Electrical resistance 抗电阻性	EN 1081	$>10^{9-10}$
Slip resistance dry 防滑干性	EN 13893	≥ 0.3
Slip resistance wet 防滑湿性	EN 51 130	R9

Performances 性能

Castor chair test 轮压测试	EN 425	No damage 合格
Colour fastness 颜色稳定性	EN ISO 105 - B02	≥ 6
Chemical products resistance 抗化学性	EN 423	Good 好
Dimensional stability 尺寸稳定性	EN 434	$\leq 0.40\%$
Curl resultant to heat 加热翘曲	EN 434	≤ 1 mm
Sound reduction 消音率	EN ISO 717/2	Approx. 4 dB
Residual indentation 残余凹陷度	EN 433	0.03 mm
Anti-bacterial and fungicidal 抗菌防霉性能		Good 好
VOC 挥发物排放量		< 10
Surface treatment 表面处理		PUR

Intertek抗菌检测报告



FloorScore环保检测报告



SGS防火检测报告

