



绮丽龙
Cherrion
复合商用卷材地板


DajuLong[®]
大巨龙弹性地板

Cherrion · Fabric

Dimension: 3.0mm x 2m x 15m



JC-1801

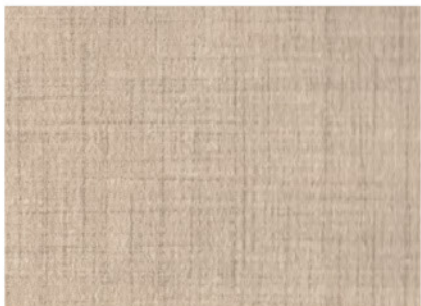


JC-1803



JC-1806



JC-1802

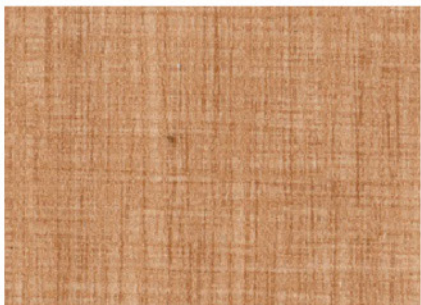

JC-1804



JC-1808



JC-1805



JC-1816



JC-1807

绮丽龙·布纹

规格: 3.0mm x 2m x 15m



JC-1811




JC-1813



JC-1815



JC-1809

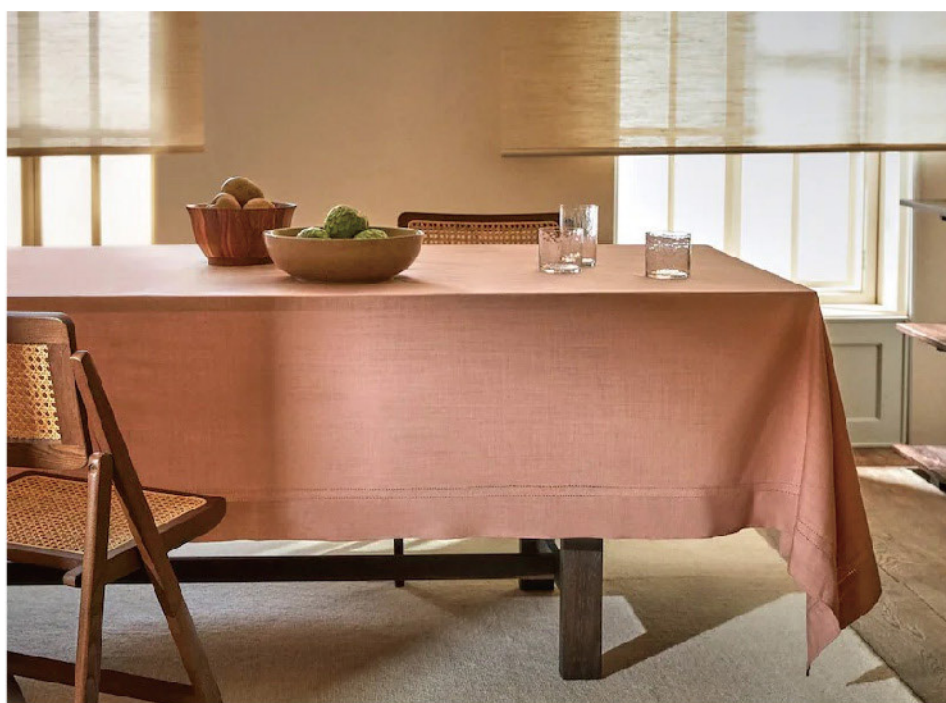


JC-1810

NEW




JC-1821

NEW

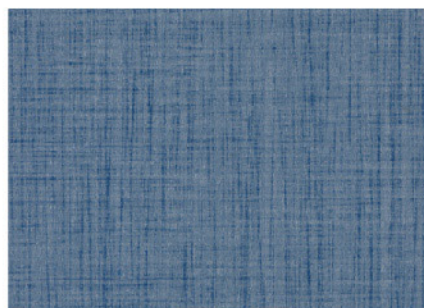

JC-1823

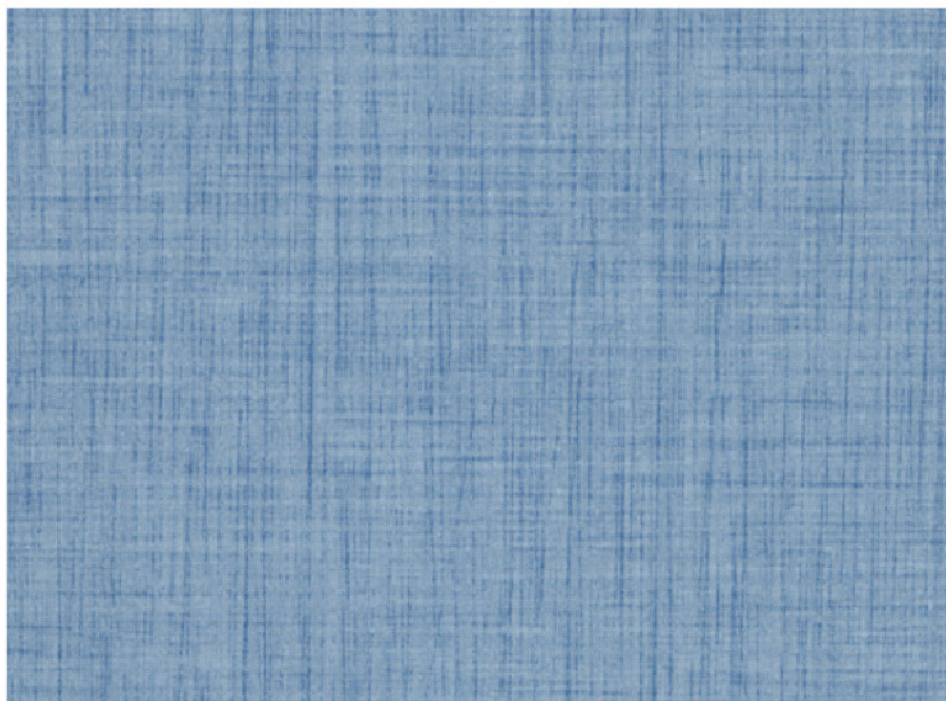


JC-1822

NEW

Cherrion · Rock

Dimension: 3.0mm x 2m x 15m

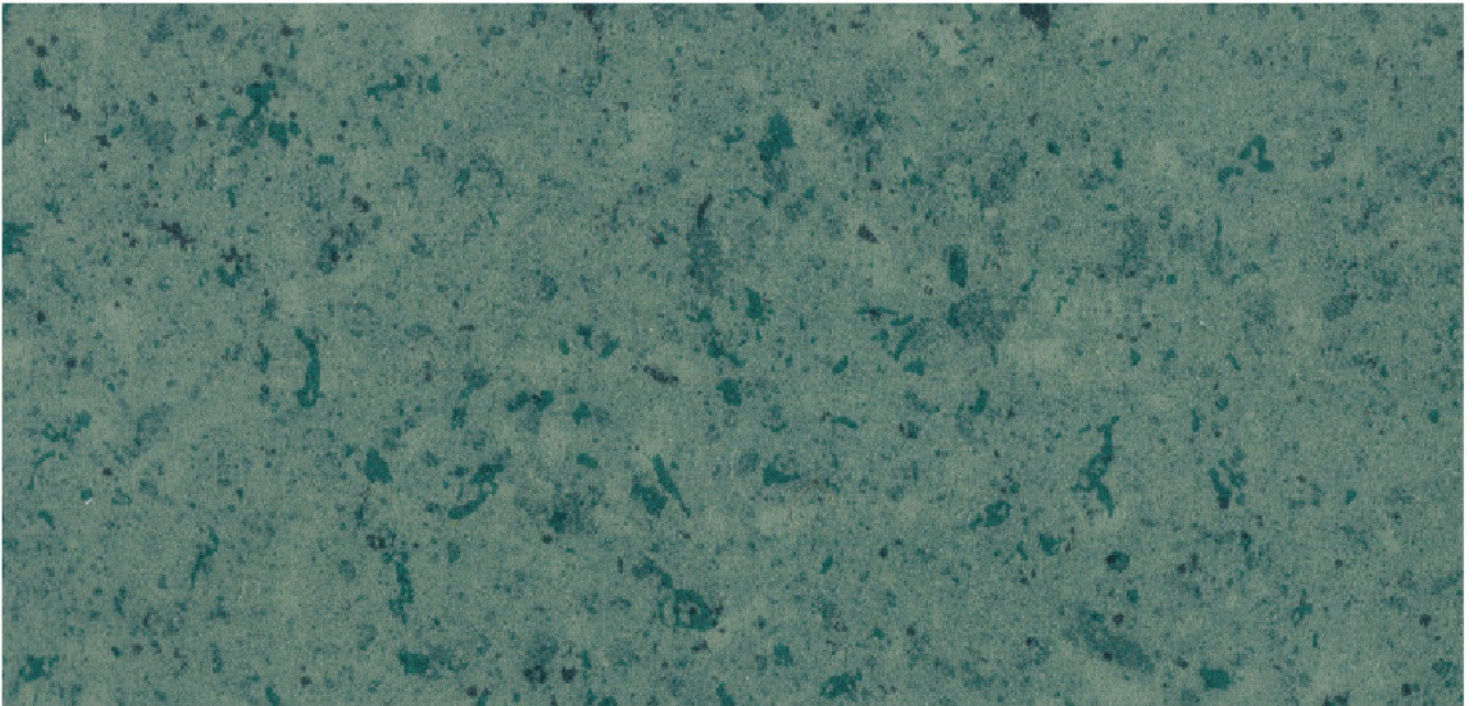


JC-631




JC-601




JC-602

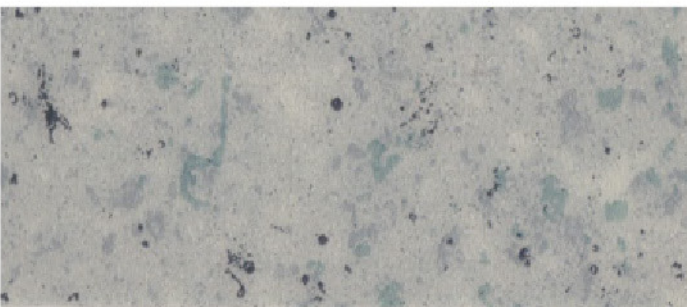

JC-611

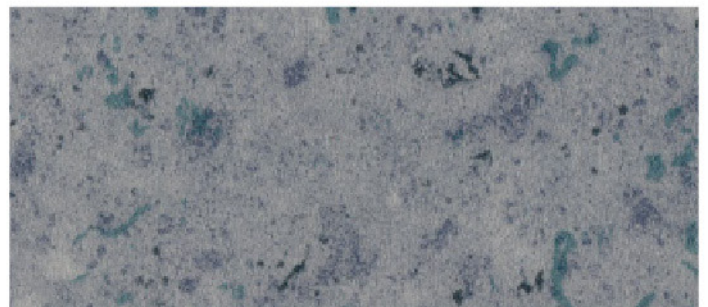

JC-612

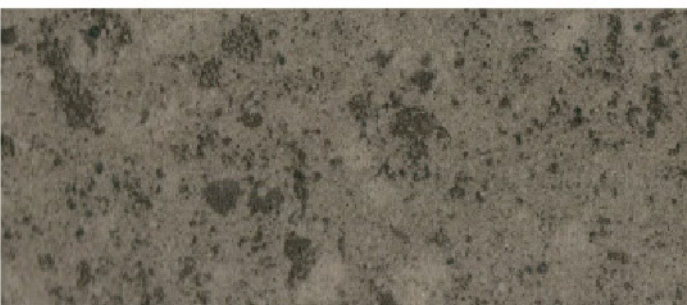


JC-621



JC-622

绮丽龙·木纹


规格: 3.0mm x 2m x 15m

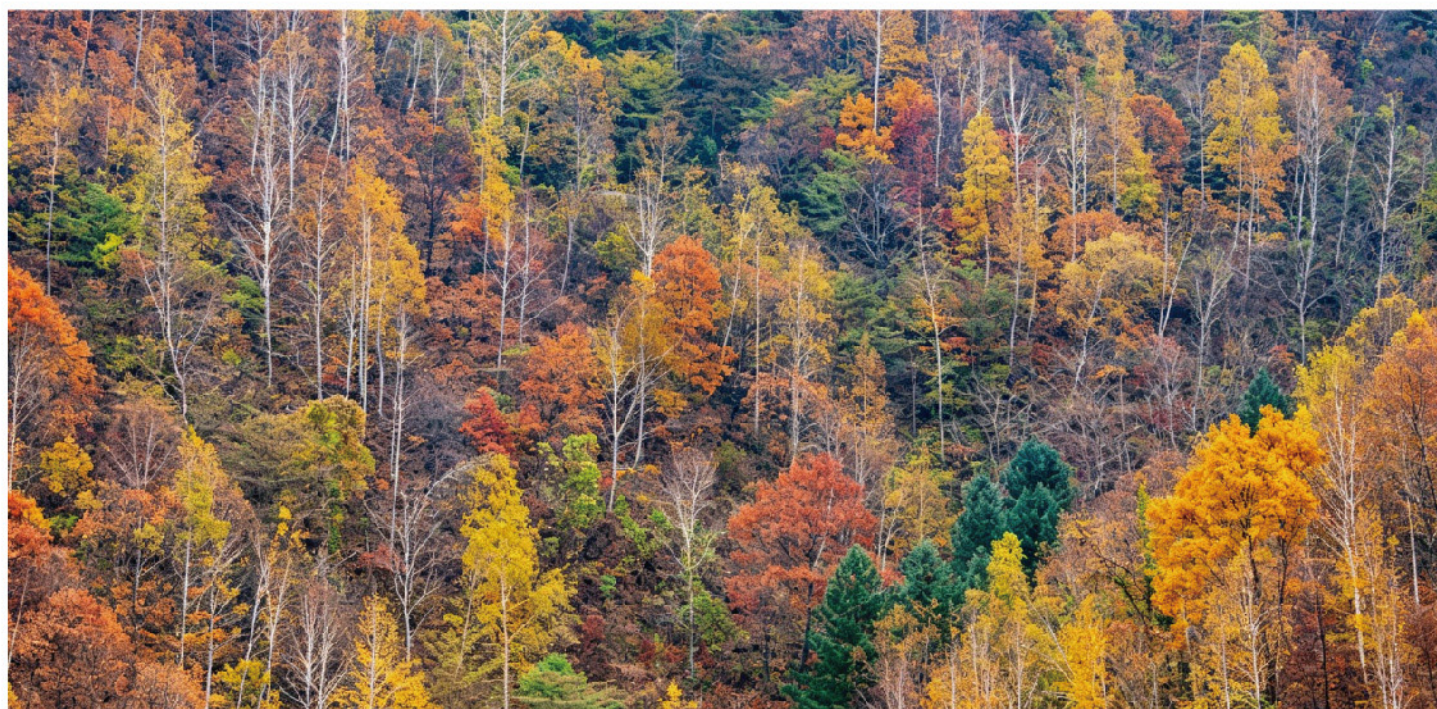

JC-683



JC-681

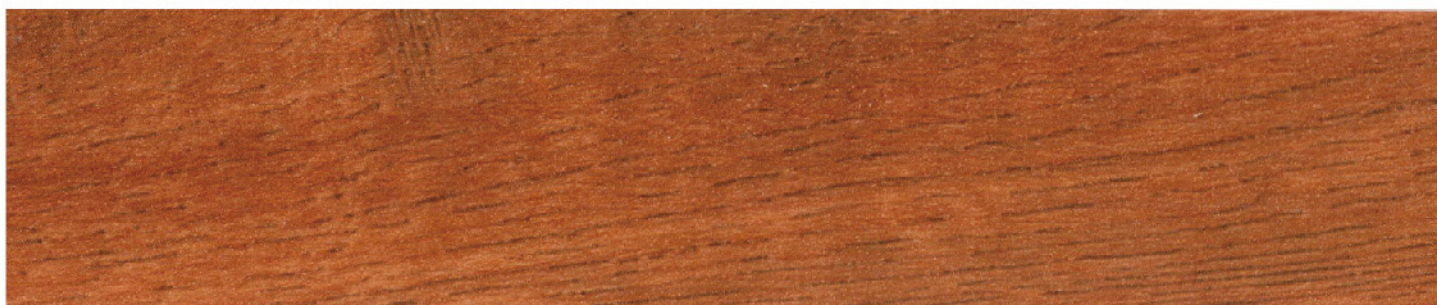

JC-682

绮丽龙

复合商用卷材地板



Description 规格	Standard 标准	Result 结果
Total thickness 总厚度	EN 428	3.0 mm
Wear layer thickness 耐磨层	EN 429	0.5 mm
Width 宽度	EN 426	2 m
Length of sheet 卷长	EN 426	15 m

Classification 类别

Fire rating 防火等级	GB 8624-2012	B1
Toxic testing 有害物质检测	GB 18586-2001	Good 合格
Electrical resistance 抗电阻性	EN 1081	$>10^{9-10}$
Slip resistance dry 防干滑性	EN 13893	≥ 0.3
Slip resistance wet 防湿滑性	DIN 51130	R9

Performances 性能

Castor chair test 轮压测试	EN 425	No damage 合格
Colour fastness 颜色稳定性	EN ISO 105- B02	≥ 6
Chemical products resistance 抗化学性	EN 423	Good 好
Dimensional stability 尺寸稳定性	EN 434	$\leq 0.40\%$
Curl resultant to heat 加热翘曲	EN 434	≤ 1 mm
Sound reduction 消音率	EN ISO 717/2	Approx. 4 dB
Residual indentation 残余凹陷度	EN 433	0.03mm
Anti-bacterial and fungicidal 抗菌防霉性能		Good 好
VOC 挥发物排放量		< 10
Surface treatment 表面处理		PUR

Intertek抗菌检测报告



FloorScore环保检测报告



SGS防火检测报告

