



Dajulong 100

同透商用卷材地板

Dajulong[®]
大巨龙弹性地板

Dajulong 100


Dimension: 2.0mm × 2m × 20m



TJ-6811



TJ-6816

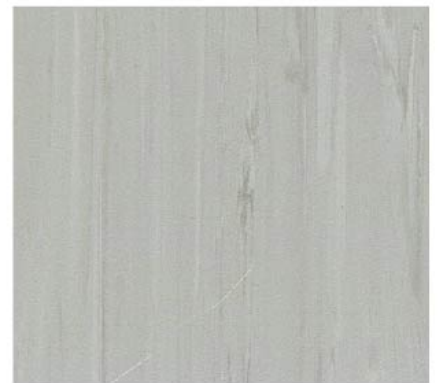

TJ-6813



TJ-6812



TJ-6814



TJ-6815



Dajulong 100


规格: 2.0mm × 2m × 20m



TJ-6802



TJ-6801

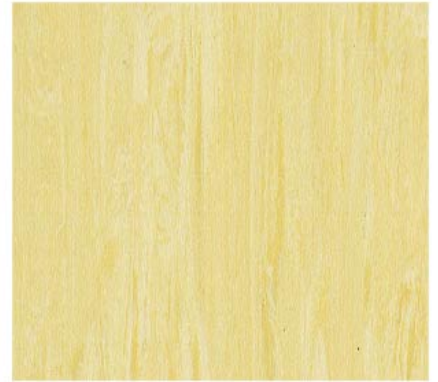

TJ-6806



TJ-6851



TJ-6803



TJ-6822



TJ-6805



TJ-6804



TJ-6823




Dajulong 100


Dimension: 2.0mm × 2m × 20m



TJ-6831

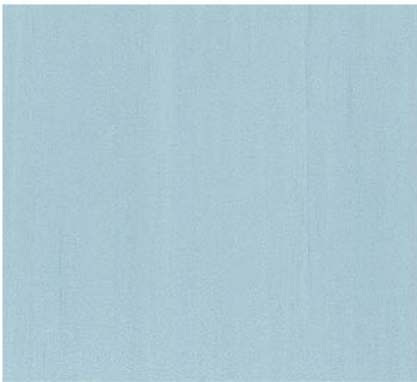

TJ-6841

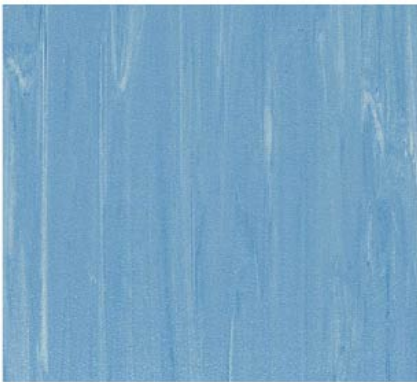


TJ-6842



TJ-6832



TJ-6845

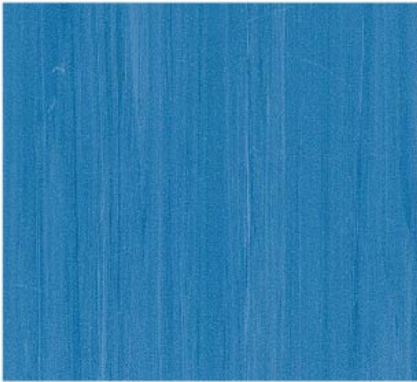

TJ-6843



TJ-6833



TJ-6846



TJ-6844



FOREVER YOUNG

VIVACIOUS

百般色彩×万般精彩

传承先锋设计理念，采用PANTONE经典色彩
元素，搭配流畅立体线条，让Dajulong 100
整体简洁利落，大气得体

○ ○ ○

感性·纯粹

以感性触及人心 因纯粹成就隽永

START

2013

RENEWAL

2025

{优雅亮相}

融合优雅设计与出色性能，辅以全维表面防护，以全面进阶的实力，重新定义高性能有方向通透的新标准。

Dajulong 100，为时代而打造！

Dajulong 100

同透商用卷材地板



Description 规格	Standard 标准	Result 结果
Total thickness 总厚度	EN 428	2.0 mm
Width 宽度	EN 426	2 m
Length of sheet 卷长	EN 426	20 m

Classification 类别

Fire rating 防火等级	GB 8624-2012	B1
Toxic testing 有害物质检测	GB 18586-2001	Good 合格
Electrical resistance 抗电阻性	EN 1081	$>10^{9-10}$
Slip resistance dry 防干滑性	EN 13893	≥ 0.3
Slip resistance wet 防湿滑性	EN 51 130	R9

Performances 性能

Castor chair test 轮压测试	EN 425	No damage 合格
Colour fastness 颜色稳定性	EN ISO 105 - B02	≥ 6
Chemical products resistance 抗化学性	EN 423	Good 好
Dimensional stability 尺寸稳定性	EN 434	$\leq 0.40\%$
Curl resultant to heat 加热翘曲	EN 434	≤ 4 mm
Sound reduction 消音率	EN ISO 717/2	Approx. 4 dB
Residual indentation 残余凹陷度	EN 433	0.03mm
Anti-bacterial and fungicidal 抗菌防霉性能		Good 好
VOC 挥发物排放量		<10
Surface treatment 表面处理		PUR

Intertek抗菌检测报告



FloorScore环保检测报告



SGS防火检测报告

